



Curved Boot type SAFE CBX

Galvanized steel curved boot with rubber seal

Application

- Spiral fitting for connecting Spiral Duct to circular duct, with rubber seal

Material

- Galvanised Steel

Composition

- Connection piece up to Ø200 achieves airtightness class D to EN 12237
- Connection piece larger than Ø200 achieves airtightness class C to EN 12237.
- The airtightness class is also determined by the installation.

Order Example

- **SAFE CBX 100 100**


Explanation :

SAFE CBX = Type of boot

100= Diameter of main duct (D)

100= Diameter of branch (d)



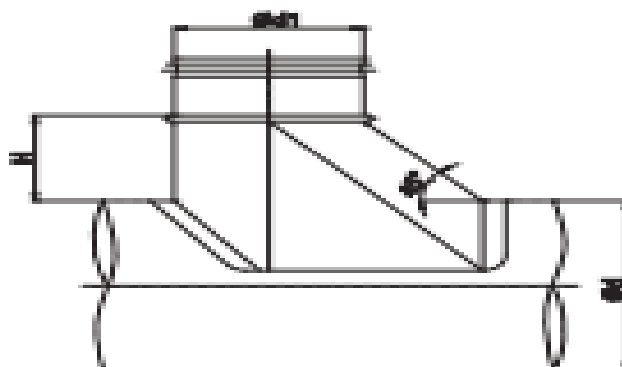

DN ₁ (mm)	DN ₂ (mm)	H (mm)
100	80	60
	100	60
125	80	60
	100	60
	125	65
150	80	60
	100	60
	125	60
	150	70
160	80	60
	100	60
	125	65
	150	70
	160	70
200	80	60
	100	60
	125	65
	150	70
	160	70
	200	80
250	80	60
	100	60
	125	65
	150	70
	160	70
	200	80