



Suspension Ring type OBDC

Suspension ring for spiral duct.

Application

- Suspension of circular ducts

Composition

- Made of hot dipped sendzimir zinc plated steel
- Maximum suspended weight of 500 kg


Order Example

- **OBDC, 250**


Explanation :

OBDC = Clamp type

250 = Diameter type

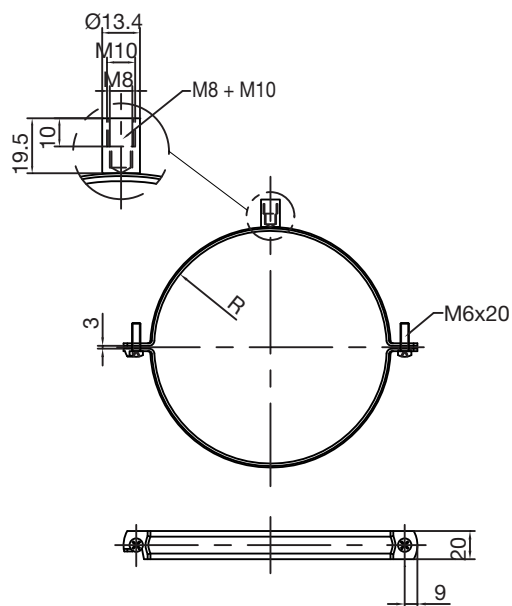

Ø80 - Ø400

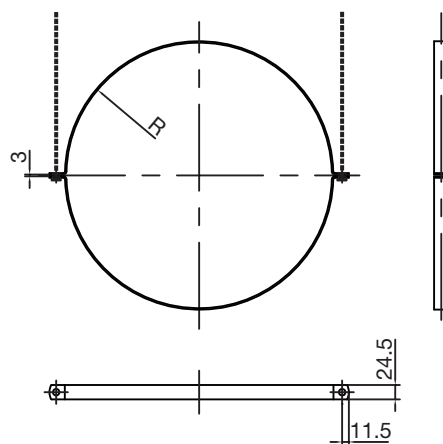

Ø450 - Ø1000

Dimensions	
OBDC	R
80	41,0±0,3
100	51,0±0,3
125	63,5±0,4
150	76,0±0,4
160	81,0±0,4
180	91,0±0,4
200	101,0±0,4
225	113,5±0,4
250	126,0±0,4
280	141,0±0,4
300	151,5±0,4
315	158,5±0,4
355	178,5±0,4
400	201,0±0,8