

**Flat 45°
Vertical Bend**

- Rectangular
- PVC (White)
- Uninsulated/Insulated



45 degree Vertical Bend type Flat 45° Vertical Bend


Light non-corroding rigid PVC for fast trouble free installation available in multiple sizes to suit installation and site requirements.

Application

- Used for extraction in a ventilation system in less accessible places such as false ceilings
- Should not be installed within flooring screed

Specifications

- White PVC
- Uninsulated
- Insulated (**Insulation wall thickness 25mm**)
- Available in the following sizes:
 - 110mm x 54mm
 - 204mm x 60mm
 - 220mm x 90mm

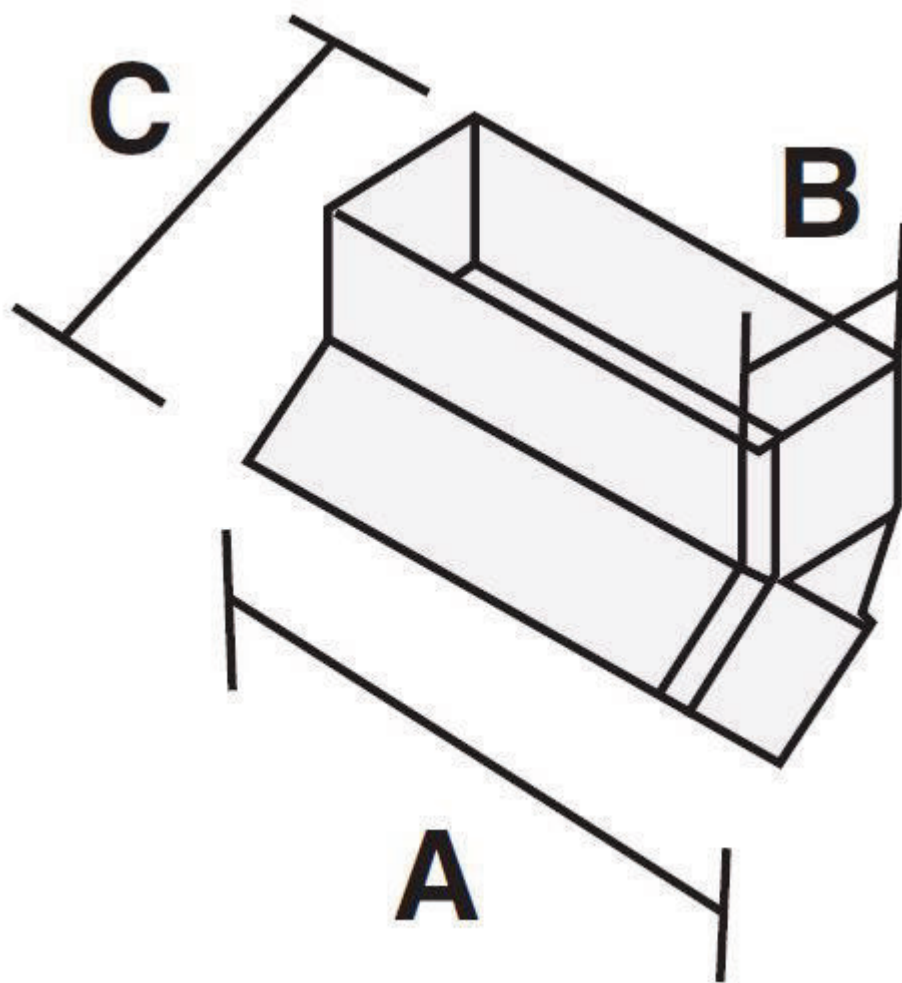

Duct Type & Size	Dimensions External (mm)			Dimensions							
	A	B	C	Pressure (Pa) @ flow rate in l/s							
Uninsulated 110 x 54	115	60	70	8	13	21	29	37	45	53	61
Uninsulated 204 x 60	210	65	85	0.1	0.5	1.3	2.5	4.4	6.9	10	13.3
Insulated 204 x 60	210	65	85	0.1	0.5	1.3	2.5	4.4	6.9	10	13.3
Duct Type & Size	Dimensions External (mm)			Pressure (Pa) @ flow rate in l/s							
	A	B	C	60	120	180					
Uninsulated 220 x 90	225	95	115	6	27	65					