

Flat 45° Bend Horizontal

- Rectangular
- PVC (White)
- Uninsulated/Insulated



45 degree Horizontal Bend type Flat 45° Bend Horizontal


Light non-corroding rigid PVC for fast trouble free installation available in multiple sizes to suit installation and site requirements.

Application

- Used for extraction in a ventilation system in less accessible places such as false ceilings
- Should not be installed within flooring screed

Specifications

- White PVC
- Uninsulated
- Insulated (**Insulation wall thickness 25mm**)
- Available in the following sizes:
 - 204mm x 60mm
 - 220mm x 90mm

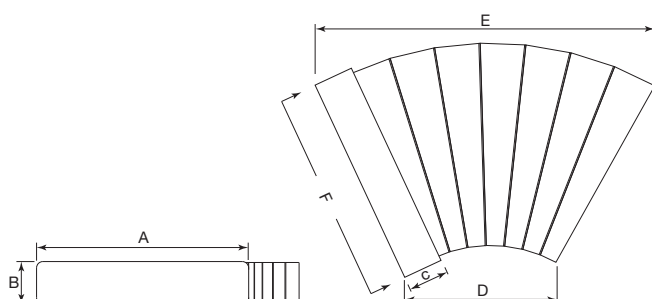

Dimensions										
Duct Type & Size	Dimensions External (mm)			Pressure (Pa) @ flow rate in l/s						
	A	B	C	8	13	21	29	37	45	53
Uninsulated 204 x 60	65	209	35	0.2	0.7	1.2	2.1	3.8	6.1	9.2
Insulated 204 x 60	65	209	35	0.2	0.7	1.2	2.1	3.8	6.1	9.2
Duct Type & Size	Dimensions External (mm)			Pressure (Pa) @ flow rate in l/s						
	A	B	C	60	120	180				
Uninsulated 220 x 90	95	225	35	5	20	46				