



Plastic duct and fittings

> **Flat Channel Dropdown**

Rectangular PVC (White) Uninsulated


Dropdown Section type Flat Channel Dropdown Light non-corroding rigid PVC for fast trouble free installation available in multiple sizes to suit installation and site requirements.

Application

- Used for extraction in a ventilation system in less accessible places such as false ceilings Should not be installed within flooring screed

Specifications

- White PVC
- Uninsulated
- Available in the following sizes:
 - 204mm x 60mm

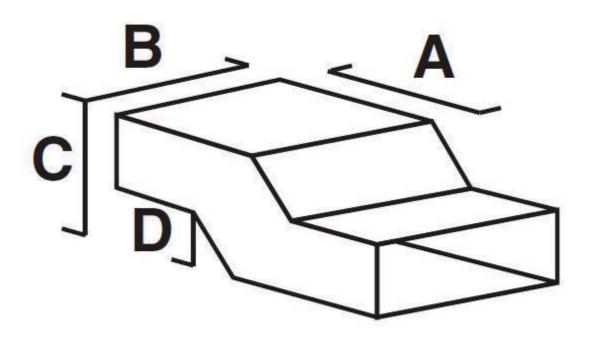



Plastic duct and fittings

| Dimensions | | | | | | | | | | | | | |
|------------|-----------------------------|-----|-----|----|--|----------------------------------|-----|-----|-----|----|-----|------|------|
| | Dimensions External (mm) | | | | | Pressure (Pa) @ flow rate in l/s | | | | | | | |
| Duct size | Α | В | | D | | 8 | 13 | 21 | 29 | 37 | 45 | 53 | 61 |
| 204 x 60 | 231 | 210 | 120 | 54 | | 0.2 | 0.5 | 1.7 | 3.6 | 6 | 9.1 | 12.4 | 16.6 |