

- Adaptor
- PVC (White)
- Uninsulated



Rectangular > Round type Adaptor


Light non-corroding rigid PVC for fast trouble free installation available in multiple sizes to suit installation and site requirements.
Adaptor to change from rectangular to round channel

Application

- Used for extraction in a ventilation system in less accessible places such as false ceilings
- Should not be installed within flooring screed

Specifications

- White PVC
- Uninsulated
- Available in the following sizes
 - 204mm x 60mm
 - 220mm x 90mm

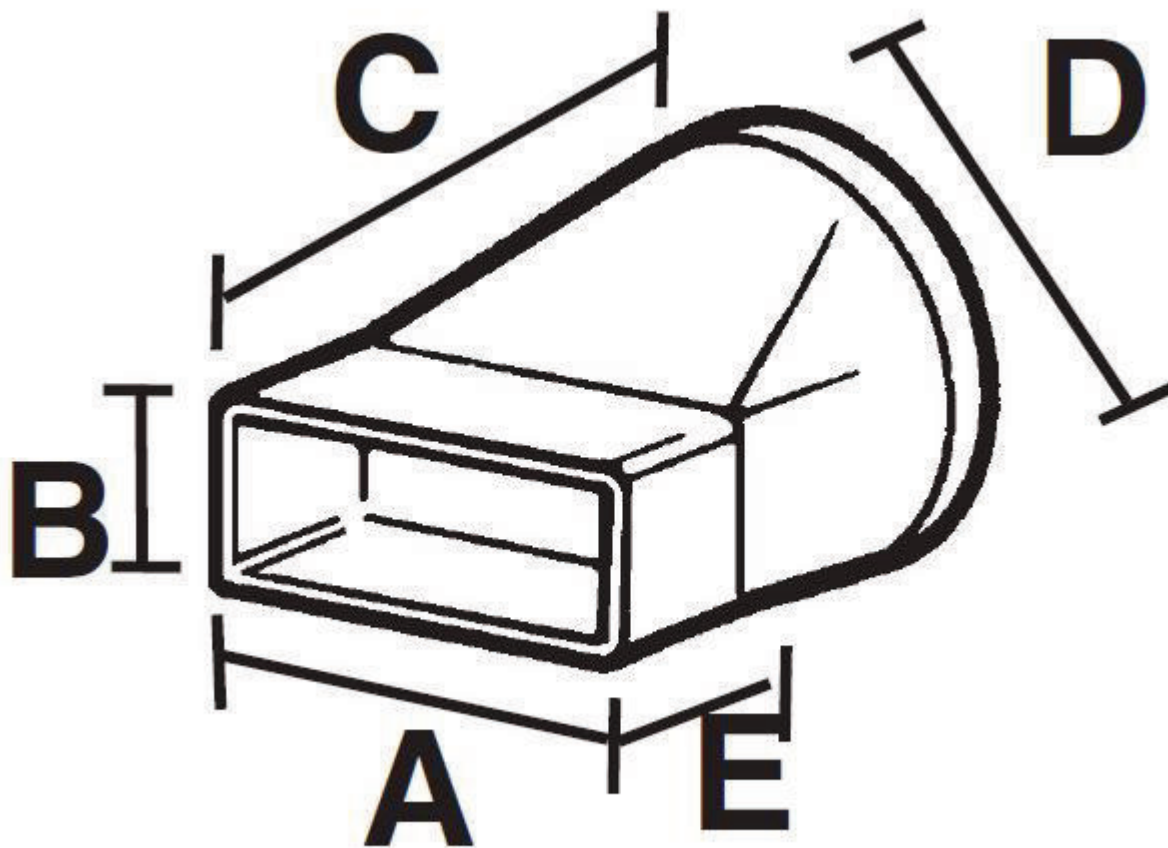

Dimensions												
Duct Type & Size	Dimensions External (mm)				Pressure (Pa) @ flow rate in l/s							
	D Ø	B	A	C	8	13	21	29	37	45	53	61
Adaptor 110 x 54 to Ø100	100	60	115	180	1.2	4.2	8.3	19.8	29.9	42	60	86
Adaptor 204 x 60 to Ø100	100	65	210	215	1	1.96	3.2	4.9	6.7	8.7	11.2	14.5
Adaptor 204 x 60 to Ø125	125	65	210	213	< 1	< 1	1.5	2.8	4.5	6.7	9	11.5
Duct Type & size	Dimensions External (mm)				Pressure (Pa) @ flow rate in l/s							
	D Ø	B	A	C	60	120	180					
Adaptor 220 x 90 to Ø150	150	95	225	203	N/A	N/A	N/A					