

Elbow Bend

- Elbow
- PVC (White)
- Uninsulated



Elbow bend - Fixed Spigot type

Elbow Bend


Light non-corroding rigid PVC for fast trouble free installation available in multiple sizes to suit installation and site requirements.

Application

- Used for extraction in a ventilation system in less accessible places such as false ceilings
- Should not be installed within flooring screed

Specifications

- White PVC
- Uninsulated
- Available in the following sizes:
 - 204mm x 60mm
 - 220mm x 90mm

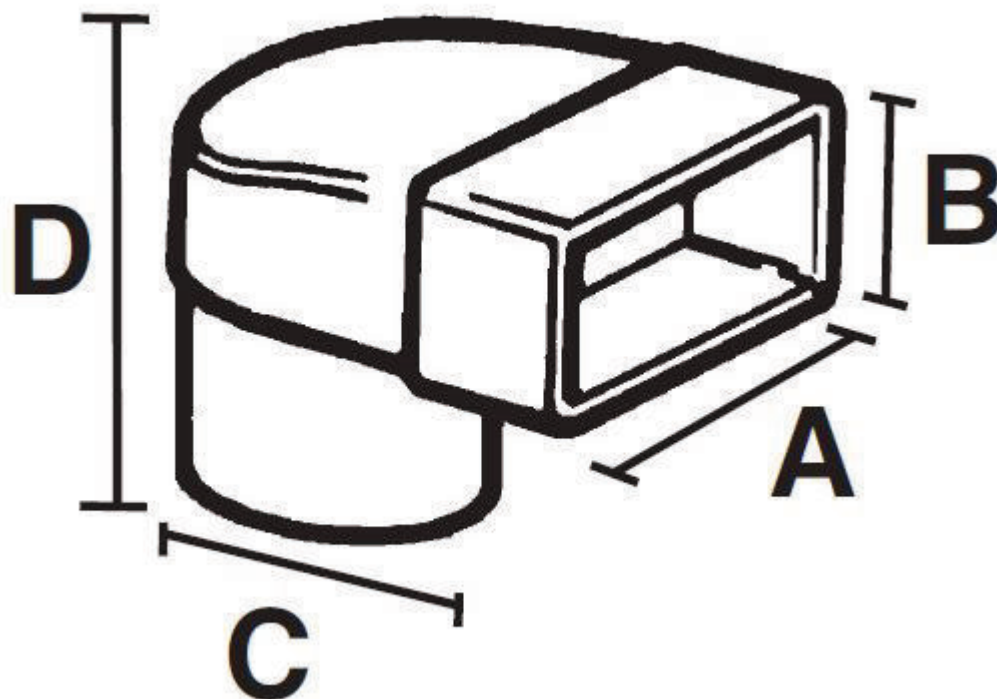

Dimensions												
Duct Type & Size	Dimensions External (mm)				Pressure (Pa) @ flow rate in l/s							
	C Ø	B	A	D	8	13	21	29	37	45	53	61
Elbow bend 204 x 60 to Ø100	100	65	210	195	2.9	7.1	15.1	28.0	45.1	68.1	92.2	118.0
Elbow bend 204 x 60 to Ø125	125	65	210	195	3.1	5.9	12.2	25.0	43.6	62.2	86.0	111.0
Elbow bend 204 x 60 to Ø150	150	65	210	195	2.8	4.9	11.6	21.0	31.0	41.0	53.0	67.0
Duct Type & Size	Dimensions External (mm)				Pressure (Pa) @ flow rate in l/s							
	C Ø	B	A	D	60	120	180					
Elbow bend 220 x 90 to Ø100	100	95	226	240	N/A	N/A	N/A					
Elbow bend 220 x 90 to Ø125	125	95	226	240	N/A	N/A	N/A					
Elbow bend 220 x 90 to Ø150	150	95	226	240	N/A	N/A	N/A					