

Circular 90° Bend

- Circular
- PVC (White)
- Uninsulated/Insulated



90 degree Bend type Circular 90° Bend


Light non-corroding rigid PVC for fast trouble free installation available in multiple sizes to suit installation and site requirements.

Application

- Used for extraction in a ventilation system in less accessible places such as false ceilings
- Should not be installed within flooring screed

Specifications

- White PVC
- Uninsulated
- Insulated (**Insulation wall thickness 25mm**)
- Available in the following sizes:
 - Ø 100 mm,
 - Ø 125 mm
 - Ø 150 mm

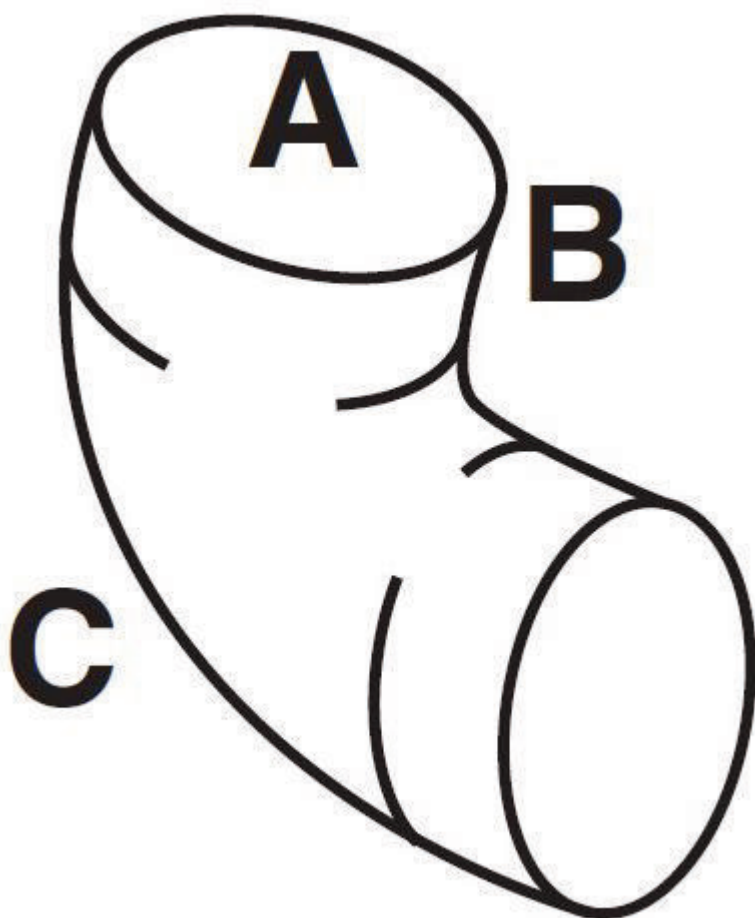

Channel Size	Dimensions										
	Dimensions External (mm)			Pressure (Pa) @ flow rate in l/s							
	Ø	A	B	8	13	21	29	37	45	53	61
Uninsulated	100	97	100	2.8	5.5	11	20.3	33	45	60	79
Insulated	100	97	200	2.8	5.5	11	20.3	33	45	60	79
Uninsulated	125	121	125	< 1	1.8	5	8.2	11.8	18	26	35
Insulated	125	121	225	< 1	1.8	5	8.2	11.8	18	26	35
Uninsulated	150	143	149	< 1	1	2.5	4.1	6.4	9.6	13.5	18
Insulated	150	143	249	< 1	1	2.5	4.1	6.4	9.6	13.5	18