

Circular 45° Bend

- Circular
- PVC (White)
- Uninsulated/Insulated



45 degree Bend type Circular 45° Bend


Light non-corroding rigid PVC for fast trouble free installation available in multiple sizes to suit installation and site requirements.

Application

- Used for extraction in a ventilation system in less accessible places such as false ceilings
- Should not be installed within flooring screed

Specifications

- White PVC
- Uninsulated/Insulated
- Available in the following sizes:
 - Ø 100 mm,
 - Ø 125 mm

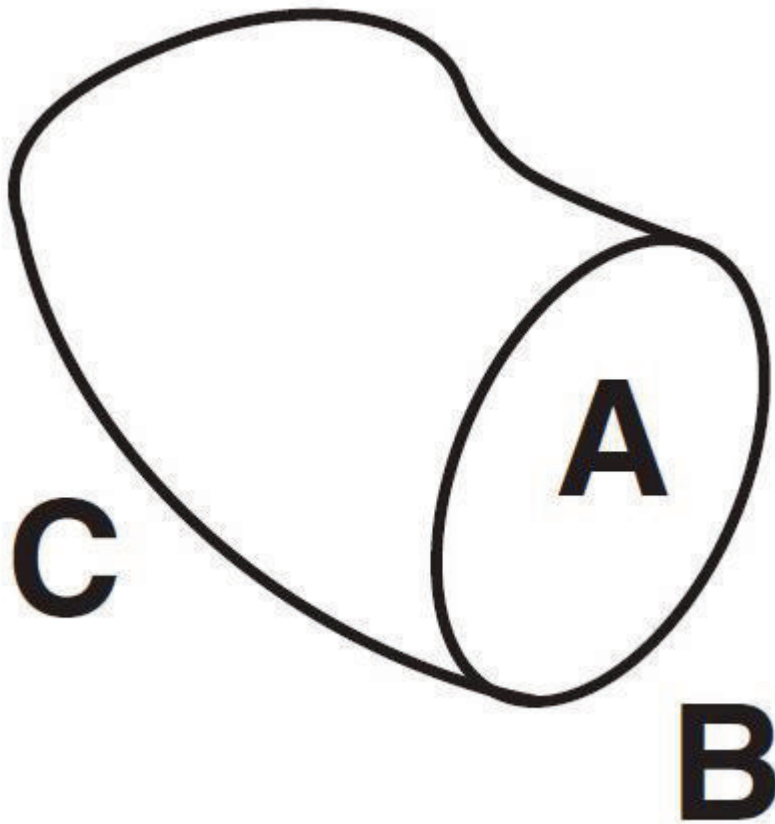

Duct size	Dimensions											
	Ø	Dimensions External (mm)			Pressure (Pa) @ flow rate in l/s							
		A	B	C	8	13	21	29	37	45	53	61
Uninsulated 100 dia	100	94	99	171	< 1	1.9	8.1	11.7	17.5	24.6	31.4	
Insulated 100 dia	100	94	199	271	< 1	1.9	8.1	11.7	17.5	24.6	31.4	
Uninsulated 125 dia	125	121	123	189	< 1	< 1	1.8	2.9	4.6	6.6	9	12.2
Insulated 125 dia	125	121	223	289	< 1	< 1	1.8	2.9	4.6	6.6	9	12.2