

- Circular
- PVC (White)
- Uninsulated/Insulated



T-piece type Circular T-piece


Light non-corroding rigid PVC for fast trouble free installation available in multiple sizes to suit installation and site requirements.

Application

- Used for extraction in a ventilation system in less accessible places such as false ceilings
- Should not be installed within flooring screed

Specifications

- White PVC
- Uninsulated
- Insulated (**Insulation wall thickness 25mm**)
- Available in the following sizes:
 - Ø 100 mm,
 - Ø 125 mm
 - Ø 150 mm

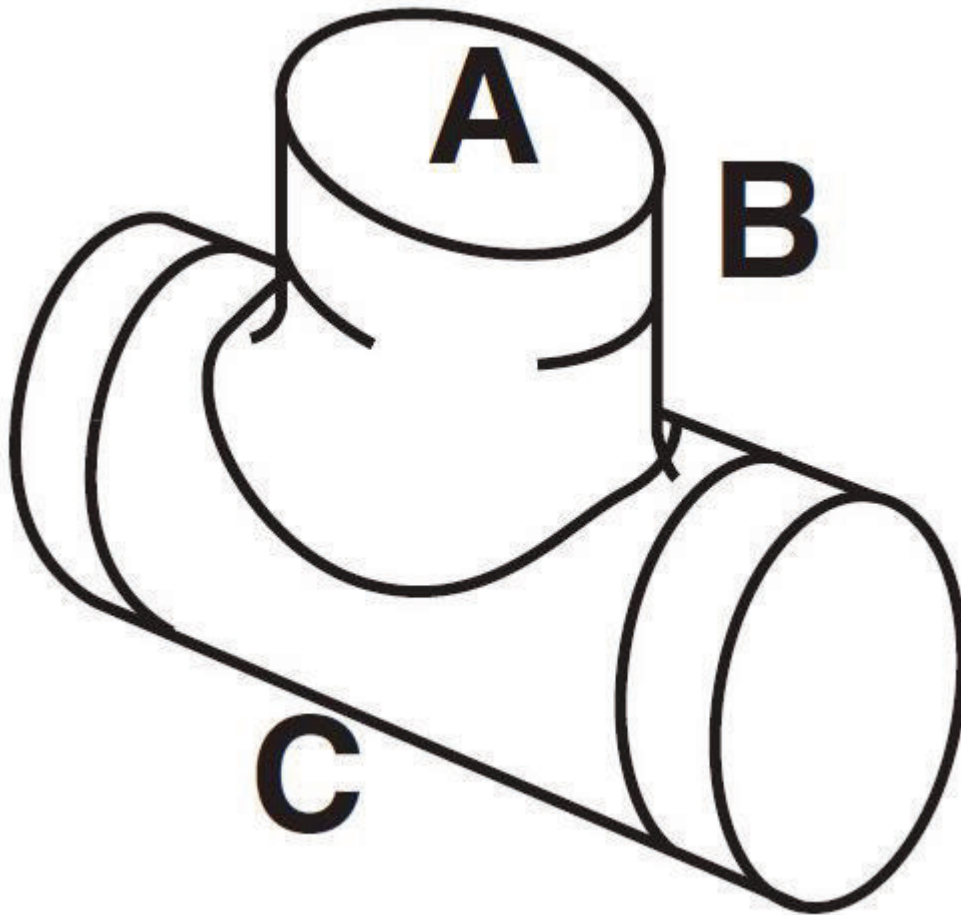

Channel Size	Dimensions											
	Dimensions External (mm)				Pressure (Pa) @ flow rate in l/s							
	Ø	A	B	C	8	13	21	29	37	45	53	61
Uninsulated	100	97	100	190	Vary on Installation							
Insulated	100	97	100	190	Vary on Installation							
Uninsulated	125	121	125	210	Vary on Installation							
Insulated	125	121	125	210	Vary on Installation							
Uninsulated	150	143	150	235	Vary on Installation							
Insulated	150	143	150	235	Vary on Installation							