



Accessory - Wired controller type BRC1E53A

Brand

Daikin

Product

Remote Controller

Applicable indoor units All Units with P1/P2 Connection

Features

PRODUCT FEATURES

- User friendly simplified remote control with contemporary design
- Duty rotation and back-up for infrastructure cooling
- Easy commissioning: intuitive interface for advanced menu settings
 Easy to use: all main functions are directly accessible. The screen turns off, when the indoor unit is not in use
- Optimise your air conditioning system by activating a series of energy saving functions (temperature range limit, setback function, off timer, ...)

 Keep track of your energy consumption with the kWh indication showing an
- indicative electricity consumption
- Demand control decreases the power consumption to 70% or 40% when other larger appliances need to be switched on (Sky Air only)
- The quiet mode function can be selected to reduce the sound of the outdoor unit
- Set up to 3 independent schedules, so the user can easily change the schedule himself throughout the year (e.g. summer, winter, mid-season)
- Automatic summer/winter time adjustment
- Possibility to individually restrict menu functions
- When a power failure occurs all settings remain stored thanks to the built-in backup power
- Support's multiple languages: English, German, French, Dutch, Spanish, Italian, Portuguese
- Home leave operation

Maintains the indoor temperature at your specified comfort level during absence, thus saving energy

Weekly timer

Can be set to start heating or cooling anytime on a daily or weekly basis.

Wired remote control

Starts, stops and regulates the air conditioner.

Infrastructure cooling

Daikin Controls

BRC1E53A

- Daikin
- Accessory
- Wired Remote Controller
- Controls
- Accessories






Daikin Controls

Remove in a reliable, efficient and flexible way the heat constantly generated by the IT and server equipment to ensure maximum uptime while offering the best return on investment.

| | | Specification | ıs | |
|--------------------------|---|---------------|----|--|
| | | | | BRC1E53A |
| Casing | Colour | | | Fresh White |
| | Button cover | | | No |
| | Operation LED | Colour | | Green |
| Dimensions | Unit | Height | Mm | 120 |
| | | Width | Mm | 120 |
| | | Depth | Mm | 19 |
| | Packed unit | Height | Mm | 50 |
| | | Width | Mm | 220 |
| | | Depth | Mm | 160 |
| Weight | Unit | | kg | 0.290 |
| | Packed unit | | kg | 0.348 |
| Packing | Material | | | Carton |
| | Weight | | kg | 0.050 |
| LCD | Type | | | Full dot (160 x 255) |
| | Dimensions | Height | Mm | 43.2 |
| | | Width | Mm | 68.85 |
| | Back light | Colour | | White |
| Temperature setting | Resolution | | °C | 1 |
| | Setpoint range | Cooling | °C | 18-32 |
| | | Heating | °C | 10-30 |
| Ambient temperature | Operation | Min. | °C | -10 |
| | | Max. | °C | 50 |
| | Storage | Min. | °C | -20 |
| | | Max. | °C | 70 |
| | Ambient temperature-=-Relative humidity <-=-% | | 96 | 95 |
| Backup for power failure | | | | Yes (the clock wil keep functioning for period not exceeding 48 hours) |

Dimensions

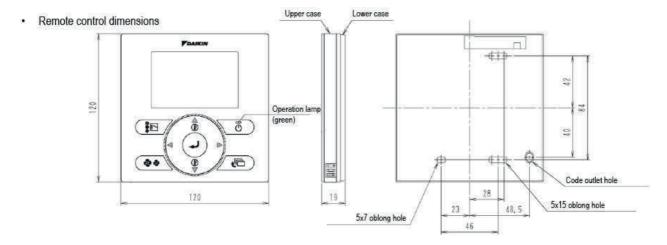



Daikin Controls

Installation

