



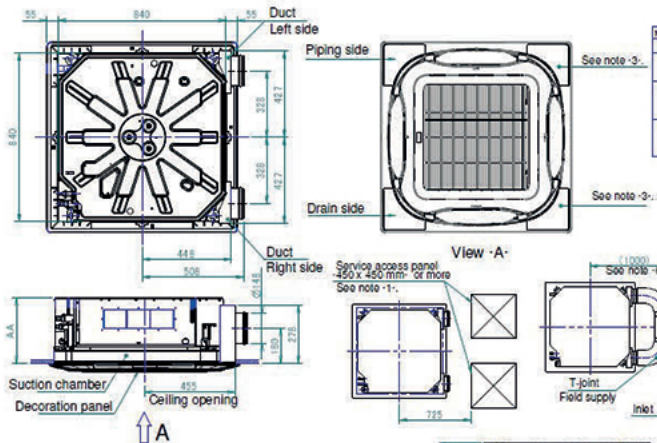

Minimal installation height		Model name
AA	AB	
277	319	FXA25/10/10/718VER
		FXA25/25/25/32/40/50/63/VER
		FXA25/25/25/32/40/50/63/VER
		FXA25/100/125/140/VER
319	361	FXA36/100/125/140/VER
		FXA36/100/125/140/VER
		FXA36/100/125/140/VER
361	403	FXA40/125/140/125/140/VER
		FXA40/125/140/125/140/VER
		FXA40/125/140/125/140/VER
		FXA40/125/140/125/140/VER


Notes

- When installing a fresh air intake kit, provide a service access panel.
- Field construction
- This corner discharge outlet needs to be closed.
- When installing a duct fan, use a wiring adapter to link the duct fan to the fan of the indoor unit.
- The intake air flow rate is recommended to be $\leq 20\%$ of the air flow rate at high fan speed. If the intake air flow rate is too large, the operating sound may increase, and the detection of the indoor unit suction temperature may be affected.
- This indicates the distance between the T-joint inlet and the indoor unit inlet when the T-tube is connected.

