



Airbrick type Airbrick


Single Air Brick Horizontal

Application

Used for extraction in a ventilation system in less accessible places such as eg. false ceilings

Specifications

- Air Grille Adaptor is supplied with the Single Air Bricks
- Colours:
 - White (RAL 9003)
 - Terracotta (RAL 8004)
 - Brown (RAL 8017)
 - Beige / Cotswold Stone (RAL 1001)
 - Grey (RAL 7037)

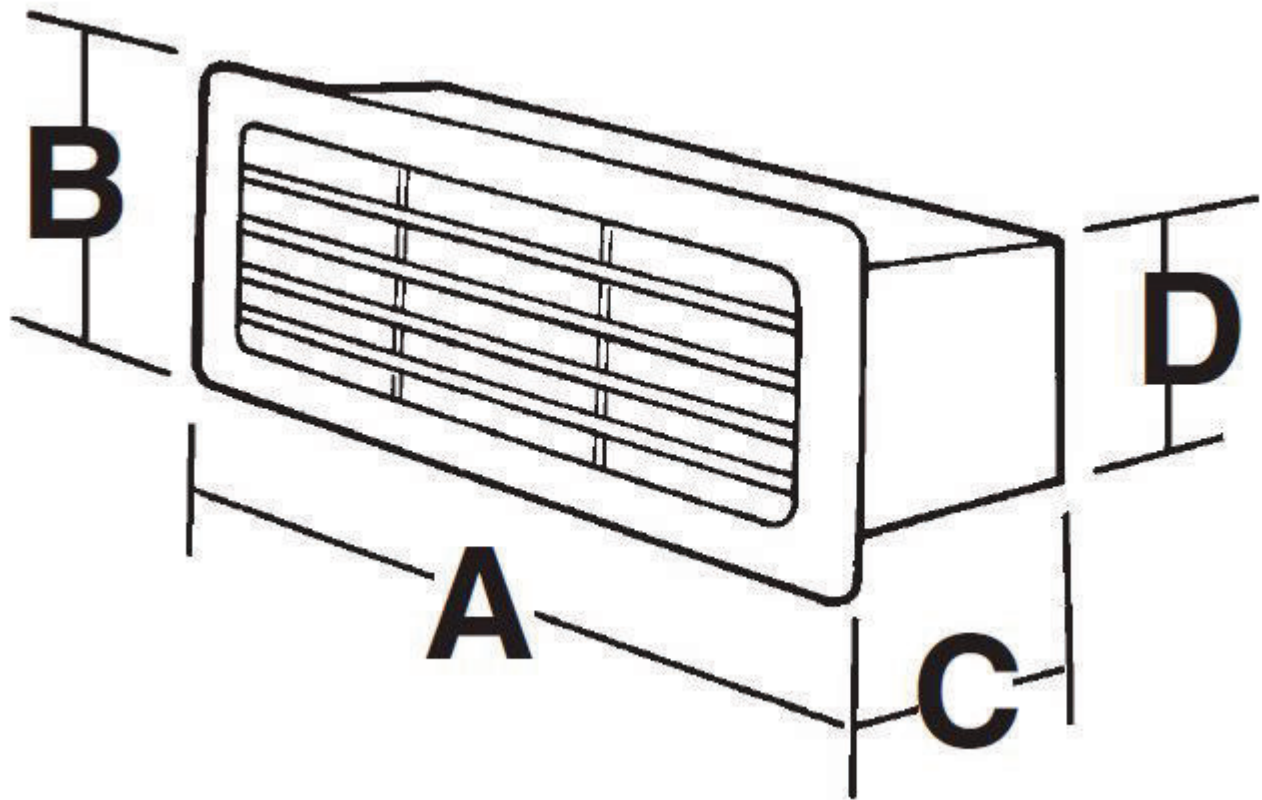

Duct size	RAL	Dimensions External (mm)				Pressure (Pa) @ flow rate in l/s							
		A	B	C		8	13	21	29	37	45	53	61
204 x 60 (White)	9003	210	65	85		3.2	7.8	20.9	39	65	96	128	176
204 x 60 (Brown)	8017	210	65	85		3.2	7.8	20.9	39	65	96	128	176
204 x 60 (Beige/Cotswold Stone)	1001	210	65	85		3.2	7.8	20.9	39	65	96	128	176
204 x 60 (Grey)	7037	210	65	85		3.2	7.8	20.9	39	65	96	128	176
204 x 60 (Terracotta)	8004	210	65	85		3.2	7.8	20.9	39	65	96	128	176
204 x 60 or 220 x 90 (White)	9003	245	145	85		0.2	1.6	4.3	8.7	13.9	21.1	27.5	37.4
204 x 60 or 220 x 90 (Brown)	8017	245	145	85		0.2	1.6	4.3	8.7	13.9	21.1	27.5	37.4
204 x 60 or 220 x 90 (Beige/Cotswold Stone)	1001	245	145	85		0.2	1.6	4.3	8.7	13.9	21.1	27.5	37.4
204 x 60 or 200 x 90 (Terracotta)	8004	245	145	85		0.2	1.6	4.3	8.7	13.9	21.1	27.5	37.4